


MODULAR RIG

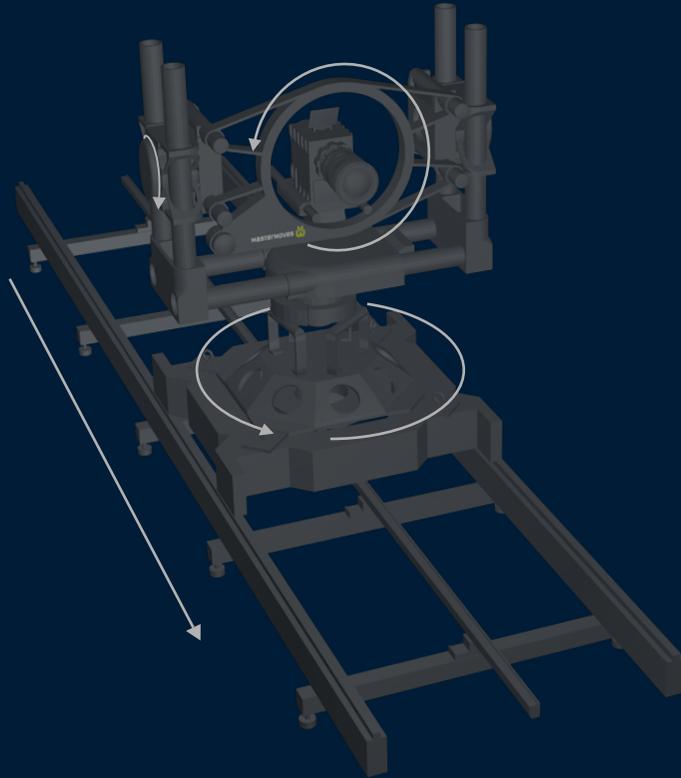

PERFORMANCE

Axis name	Range of travel	Maximum speed
Track	as required	2m per sec
Pan	∞	120° per sec
Tilt	∞	120° per sec

DRIVE MECHANISM

Rack & Pinion

FLAIR MOTION CONTROL SOFTWARE

Repeat moves	Variable speed moves
Variable camera speed moves	Stop frame animation
Moving step animation	Target tracking
CGI Import Export	Rotated moves
Scaled Moves	Event triggered moves
Timecode triggered moves	Timelapse
Video HD synchronised moves	

POWER SUPPLY

Power requirements: 110-240V AC, single phase
Maximum motor power: 35V 8A per channel

WEIGHT

Base	20 kg
Head	23 kg
Rotate ring	10 kg
Control System	10 kg
Max. camera weight	35 kg

